

Fiber Optic Network Innovations to Bypass the Red Sea Route

Raj E.¹, Dhanalakshmi K. M.²

Department of Electronics and Communication Engineering, S.A. Engineering College, Anna University, Chennai, Tamil Nadu, India.

E-mail: ¹eraj27320@gmail.com, ²dhanalakshmi@saec.ac.in

Abstract

This ambitious project seeks to establish a robust, high-speed fiber optic network that will connect Europe with South Asia through a terrestrial route spanning Saudi Arabia, Iraq, Turkey, Bulgaria, Hungary, and Austria. The project presents a strategic alternative to traditional maritime internet cables, which often traverse underwater routes from Europe to South Asia. By relying on a land-based network, this initiative aims to mitigate some of the risks associated with undersea cables, such as disruptions caused by natural disasters, shipping accidents, or geopolitical tensions in maritime zones. One of the key components of this project is infrastructure development. This involves laying extensive fiber optic cables, building data centers, and ensuring that the network is both secure and scalable. Unlike the challenges faced by undersea networks, land-based infrastructure allows for easier maintenance, potential expansions, and faster upgrades to meet future demands for higher data speeds and increased bandwidth. Technology integration plays a crucial role as well. Advanced networking technologies like 5G, edge computing, and cloud services can be integrated into this fiber optic network, enabling the efficient handling of vast amounts of data and enhancing overall performance. The deployment of state-of-the-art technologies will also help in reducing latency, improving user experience, and fostering innovation in the region.

Keywords: Monitoring, integrated development environment, Internet of Things, Fiber optic network, service level agreement.

1. Introduction

This paper aims to create a resilient and high-speed fiber optic network connecting Europe, Gulf, and South Asia countries through Saudi Arabia, Iraq, Turkey, Bulgaria, Hungary, Romania, Switzerland, and Austria, providing a viable route between Europe and South Asia countries [1]. By focusing on infrastructure development, technology integration, and stakeholder collaboration, this initiative will significantly enhance digital connectivity in the region, addressing the limitations and challenges of existing internet connectivity through subsea routes. It helps to mitigate the hazards in the red sea to global data transmission, minimize the overall delay by up to 30 percent, and fulfill the global data crisis in case of any issues with the traditional subsea route through the red sea [2]. Existing subsea routes suffer from high latency, impacting real-time applications and data-intensive services. The growing demand for data and internet services requires more robust and scalable bandwidth solutions. Reliance on subsea cables passing through the Red Sea poses potential geopolitical risks and disruptions [3]. An incident management system has been implemented that provides visibility on the provider network performance, such as fiber cuts and equipment-related issues. For repairs concerning fiber cuts or outages, we have direct contact with the provider team and escalate issues on a timely basis to speed up the process and meet the SLA (Service Level Agreement). We implement reserved capacity to avoid prolonged outages. A maintenance management system has been implemented with an SLA to notify the details of planned works. [4]. The project will analyze the existing telecommunications infrastructure in the region and pinpoint areas that require new fiber optic lines, repeater stations, and supporting infrastructure. Where possible, the project will aim to utilize and integrate with existing infrastructure to optimize resources and minimize disruption. The assessment will take a holistic view, ensuring the new fiber optic network seamlessly integrates with and enhances the overall regional connectivity landscape [5].

2. Related work

Focusing on these aspects, the project will significantly enhance digital connectivity in the region, playing a critical role in bridging the digital divide between Europe and South Asia. By providing a direct and efficient alternative to traditional subsea internet cables, this initiative addresses key challenges such as latency, reliability, and the susceptibility of undersea cables to disruptions caused by environmental factors, accidents, or sabotage. The increased speed

and reliability of this infrastructure could have transformative effects across various sectors. For instance, it would enable seamless communication and data exchange, fostering innovation in technology and enabling the rapid scaling of cloud-based services. The reduction in latency and potential cost savings could make high-speed internet more accessible to businesses and individuals alike, fueling digital inclusion. From an economic perspective, the project could serve as a catalyst for growth by supporting the expansion of e-commerce platforms, digital financial services, and cross-border trade ecosystems. This connectivity boost would empower and enhance supply chain efficiencies and create new opportunities for digital entrepreneurship. Moreover, improved internet infrastructure can attract global tech companies to invest in the region, stimulating job creation and skill development in industries such as data processing, artificial intelligence, and cyber-security. Additionally, the enhanced resilience of internet connectivity would be crucial for critical services such as healthcare, education, and emergency response systems, enabling them to function seamlessly even during crises.

Transport-layer throughput is significantly impacted in terms of performance by network packet losses. Lost packets necessitate retransmissions for dependable data flow, which results in extremely lengthy delays. Performance issues arise from this tail of the packet delay distribution. To cut down on lengthy delays for some packets, there are a number of ways to trade off networking resources in advance. As an alternative, we suggest packet pacing, which adds deliberate delay to packet transmissions to improve traffic characteristics. Although this deliberate delay goes against the best-effort principle, it can lessen traffic burstiness and enhance network performance generally, especially in networks with limited packet buffers. [1]. For specific applications, including data transfer for earthquake early warning, financial business transactions, and interactive services like online games, latency is a crucial metric to characterize the performance of transmission networks. Both signal processing delays at nodes and transmitters as well as signal propagation delays brought on by electromagnetic wave propagation, make up latency. Wave propagation speed in standard single-mode fibers (SMFs) is slower than c , which determines the lower limit of latency in transmission systems using SMFs. Large core fibers, hollow fibers, and photonic crystal fibers can all transport light more quickly than SMFs and have low effective refractive indices. Since signals travel at speed c in free-space optical systems, the latency may be less than that of optical fibers [2]. The majority of routers and packet switches are still operating at client data rates of 1, 2.5, and 10 Gbps in the interim. By reducing the number of wavelengths and enabling efficient use of wavelength capacity, optical transport network (OTN) switching technology network costs [14]. It has been

shown that employing an integrated OTN/WDM switch architecture is more economical since it does away with the requirement for short-reach client interfaces. Furthermore, compared to a configuration that uses a programmable optical add-drop multiplexer, [15] the OTN/WDM uses less power and rack space [3] In this work, we create a regional area information distribution network platform, NerveNet, which consists of a mesh network system and distributed server functionalities. NerveNet is a network system made up of a CPU board running Linux and hardware for a Layer 2 Virtual Local Area Network (VLAN) switch [5]. Comparing CD and CDC nodal architectural technologies for flex grid DWDM optical networks is the primary goal of the article. A DWDM network is optimized for both nodal designs using the chosen methodology, and resource usage is compared. A number of heuristic algorithms inspired by nature, primarily based on evolutionary algorithms, have been chosen to tackle the optimization problem using practical computer resources. Numerical tests were performed for two different backbone networks [6].

3. Proposed System Model

We need to utilize the existing terrestrial network path from another transmission provider on the required segment to connect to our own service path to minimize project costs. We will select the transmission provider based on the network build-up and service stability during the testing of their segments. We will work together to increase capacity and stability.

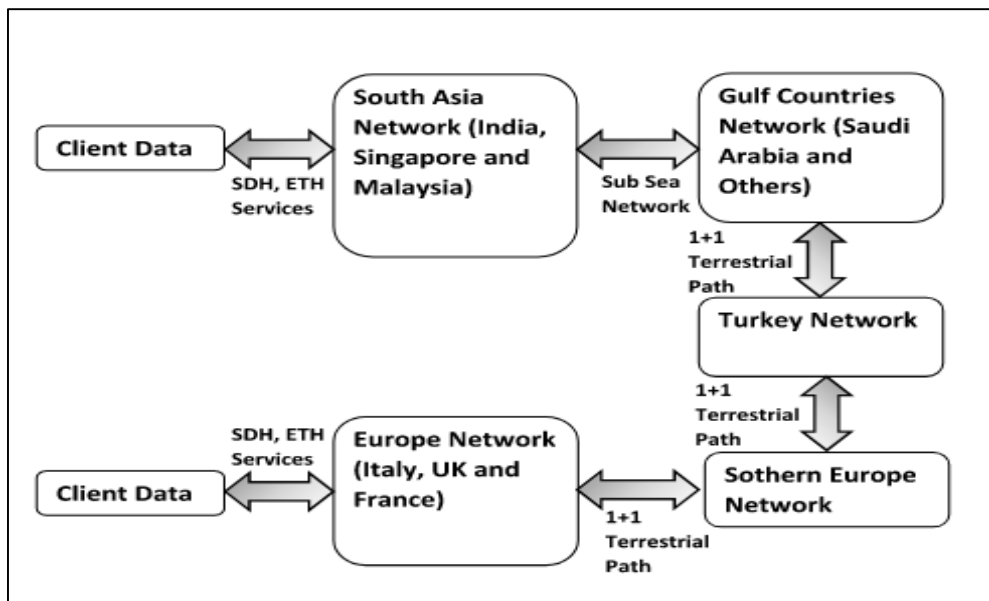


Figure 1. Block Diagram

Flex Grid enables precise bandwidth allocation, minimizing wasted capacity. The granular nature of Flex Grid allows for seamless capacity scaling to meet evolving demands. It supports a wide range of bandwidth services, from low-capacity to high-capacity. Optimized resource utilization and simplified network management can lead to cost savings [13]. Flex Grid is well-suited for emerging technologies like 400G and 800G, ensuring network readiness for future advancements. Upgrading network hardware and software may require significant upfront costs. In fixed grid mode, bandwidths cannot be adjusted flexibly. By enabling efficient use of the optical spectrum, flexible grid mode supports modern, high-capacity networks and is particularly beneficial for applications involving dynamic traffic patterns, such as data centers, cloud computing, and 5G networks [7]. Effective collaboration with service providers is crucial for maintaining seamless network operations and ensuring service reliability. The following key aspects outline how service provider collaboration is structured to manage incidents, repairs, maintenance, and continuous improvements [9].

4. Result

Table 1 shows the Comparison of parameters between Sub Sea Path and Terrestrial Path highlighting differences in cost, maintenance, fault tolerance, and performance.

IMPROVED	SUB SEA PATH	TERRESTRIAL PATH
Deployment and Maintenance Cost	Very High	Moderate
Repair and Maintenance Time	3 Days to 1 Month	1 hour to 1 Day
Permits approval for work	1 Month to 5 Months	1 Day to 7 Days
Fault Isolation	Complex	Medium
Capacity Risk	In Single Point of failure	Protection path will be available
Bandwidth	Moderate	Very High

Table 1. Comparison of Parameters

4.1 Repair Operations for Subsea and Terrestrial Faults

Repair operations for faults occurring in subsea systems, whether in the wet plant (underwater components like cables and repeaters) or the dry plant (land-based terminal equipment), are highly complex, time-consuming, and involve significant risks. These operations often require specialized equipment, skilled resources, and coordination with

multiple stakeholders, including government authorities, which can lead to prolonged delays. If the fault involves a repeater, the repair process becomes even more challenging. The carrier delay is configured based on the latency characteristics of each provider's transmission medium. Latency is determined by the physical distance, transmission technology, and overall network conditions [11]. Figure 2 represents repair time and cost.

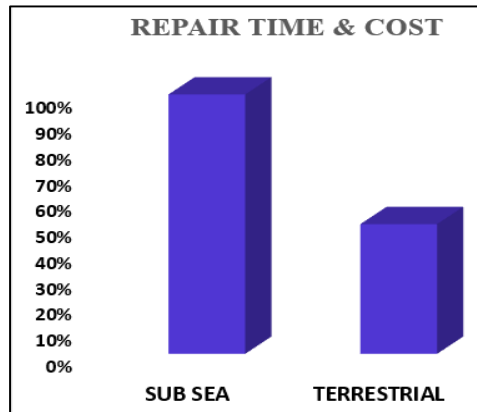


Figure 2. Repair time & Cost

4.2 Cost and Latency

Installation of subsea cables is extremely high cost and mid-rate latency compared to terrestrial fiber cables. The process involves site surveys, route map preparation, and obtaining an NOC from other cable operators or the government. In the case of terrestrial cables, the installation cost and securing the permits are much easier compared to subsea cable systems. The latency will reduce by 30% from the existing subsea path due to geological location [6]. Figure 3 represents the latency and Figure 4 shows the plot of Latency Issues.

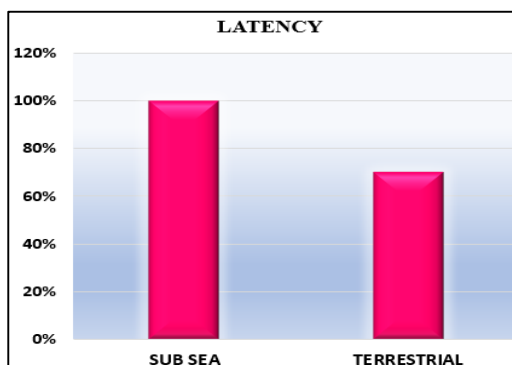


Figure 3. Latency

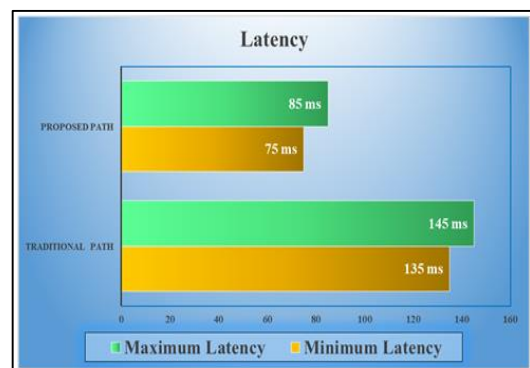


Figure 4. Latency issues

4.3 Encryption and Authentication

Layer 3 (L3) protocols are employed to further enhance security at the end-user level. These protocols ensure the confidentiality and authenticity of data by implementing advanced encryption and authentication techniques. Encryption protects data from being deciphered by unauthorized parties, while authentication ensures that only verified users can access the network. Additionally, artificial intelligence (AI) security protocols are integrated to monitor the system in real time, detect anomalies, and respond proactively to emerging cyber threats. This AI-driven approach strengthens the network's ability to adapt to evolving cyber-security challenges [8].

5. Conclusion and Future Work

Increase the high data rate for the expanding internet access in the future and reduce latency by 30% from the present network routes globally between Europe and South Asia. This ambitious project aims to create a resilient and high-speed fiber optic network connecting Europe through Iraq, Turkey, Bulgaria, Hungary, and Austria, providing a viable alternative to maritime routes to south Asian countries. By focusing on infrastructure development, technology integration, and stakeholder collaboration, this initiative will significantly enhance digital connectivity in the region, addressing the limitations and challenges of existing internet connectivity through subsea routes. Fiber optic network innovations to bypass the Red Sea route represent a strategic advancement in global data connectivity. By creating alternative routes, ESFIBER aims to enhance network resilience, reduce latency, and increase data capacity while minimizing exposure to geopolitical risks and high-risk areas. These efforts will enable faster, more secure data transfer across Europe, Asia, and Africa, benefiting a broad range of industries reliant on low-latency, high-capacity networks. Through the adoption of cutting-edge fiber optic technologies and a commitment to environmental sustainability, ESFIBER's project not only addresses current challenges data connectivity but also underscores the importance of diversifying global data pathways and strengthens the backbone of international communication in an increasingly interconnected world. Increasing global internet bandwidth and data speed, an innovative fiber optic network could help redefine international data connectivity, enhance security and resilience, reduce latency, and increase capacity, especially for data traveling between Europe, Asia, and Africa. This project would mark a strategic advancement in global telecom infrastructure, benefiting a wide range of

industries and users. Developing routes with minimal environmental impact, potentially avoiding sensitive ecosystems and minimizing carbon footprint by optimizing route efficiency will be crucial. Implementing energy-efficient fiber optic technologies to reduce the overall environmental impact of data transmission is also essential.

References

- [1] Wang, Dong, Mingqing Zuo, Donggen Guan, Jianghua Gu, Tao Lu, Dawei Ge, Jian Wang et al. "Demonstration of a Cost-Effective WSS-Free Colorless Flex-Grid ROADM with Coherent Detection and Wavelength Monitoring for Optical Metro Networks." In 2023 Opto-Electronics and Communications Conference (OECC), IEEE, (2023): 1-3.
- [2] Masood, Muhammad Umar, Ihtesham Khan, Lorenzo Tunesi, Bruno Correia, Enrico Ghillino, Paolo Bardella, Andrea Carena, and Vittorio Curri. "Network performance of ROADM architecture enabled by novel wideband-integrated WSS." In GLOBECOM 2022-2022 IEEE Global Communications Conference, IEEE, (2022): 2945-2950.
- [3] Kozdrowski, Stanisław, Mateusz Żotkiewicz, and Sławomir Sujecki. "Resource optimization in fully flexible optical node architectures." In 2018 20th International Conference on Transparent Optical Networks (ICTON), IEEE, (2018): 1-4.
- [4] Li, Yongcheng, Jingjing Li, Liangjia Zong, Sanjay K. Bose, and Gangxiang Shen. "Upgrading nodes with colorless, directionless, and/or contentionless ROADMs in an optical transport network." In 2020 22nd International Conference on Transparent Optical Networks (ICTON), IEEE, (2020): 1-4.
- [5] Papapavlou, Charalampos, Konstantinos Paximadis, and Giannis Tzimas. "Analyzing ROADM costs in SDM networks." In 2020 11th International Conference on Information, Intelligence, Systems and Applications (IISA), IEEE, (2020): 1-7.
- [6] Rivas-Moscoso, José Manuel, Behnam Shariati, Dan M. Marom, Dimitrios Klonidis, and Ioannis Tomkos. "Comparison of CD (C) ROADM architectures for space division multiplexed networks." In Optical Fiber Communication Conference, Optica Publishing Group, (2017): Th2A-45.

- [7] Morão, Diogo C., Luís G. Cancela, and Joao L. Rebola. "Exploring future large-scale ROADM architectures." In 2021 Telecoms Conference (ConfTELE), IEEE, (2021): 1-6.
- [8] Ramos, João Frederico Ó., Luís Cancela, and João Rebola. "Influence of the ROADM architecture on the cost-per-bit in C+ L+ S multi-band optical networks." In 2023 23rd International Conference on Transparent Optical Networks (ICTON), IEEE, (2023): 1-4.
- [9] Masood, Muhammad Umar, Ihtesham Khan, Lorenzo Tunesi, Bruno Correia, Rasoul Sadeghi, Enrico Ghillino, Paolo Bardella, Andrea Carena, and Vittorio Curri. "Networking analysis of photonics integrated multiband WSS based ROADM architecture." In 2022 International Conference on Software, Telecommunications and Computer Networks (SoftCOM), IEEE, (2022): 1-6.
- [10] Klinkowski, Mirosław, Mateusz Żotkiewicz, Krzysztof Walkowiak, Michał Pióro, Marc Ruiz, and Luis Velasco. "Solving large instances of the RSA problem in flexgrid elastic optical networks." *Journal of Optical Communications and Networking* 8, no. 5 (2016): 320-330.
- [11] Kozdrowski, Stanisław, Mateusz Żotkiewicz, and Sławomir Sujecki. "Optimization of optical networks based on CDC-ROADM technology." *Applied Sciences* 9, no. 3 (2019): 399.
- [12] Kozdrowski, Stanisław, Mateusz Żotkiewicz, and Sławomir Sujecki. "Ultra-wideband WDM optical network optimization." In *Photonics*, vol. 7, no. 1, p. 16. MDPI, 2020.
- [13] Shariati, Behnam, Antonia Mastropaolo, Nikolaos-Panteleimon Diamantopoulos, José Manuel Rivas-Moscoso, Dimitrios Klonidis, and Ioannis Tomkos. "Physical-layer-aware performance evaluation of SDM networks based on SMF bundles, MCFs, and FMFs." *Journal of Optical Communications and Networking* 10, no. 9 (2018): 712-72
- [14] Poggiolini, Pierluigi, Gabriella Bosco, Andrea Carena, Vittorio Curri, Yanchao Jiang, and F. Forghieri. "The GN-model of fiber non-linear propagation and its applications." *Journal of lightwave technology* 32, no. 4 (2013): 694-721

- [15] Moreno-Muro, Francisco-Javier, Rubén Rumipamba-Zambrano, Jordi Perelló, Pablo Pavón-Mariño, Josep Solé-Pareta, Ricardo Martínez, Ramon Casellas et al. "Elastic Networks thematic network results I: planning and control of Flex-Grid/SDM." In 2018 20th International Conference on Transparent Optical Networks (ICTON), IEEE, (2018): 1-4.