

Optic Disc Localization using Fuzzy C Mean and DB Scan Clustering - A Comparative Analysis

J. Prakash¹, B. Vinoth Kumar²

PSG College of Technology, Coimbatore, India

E-mail: jpk.cse@psgtech.ac.in¹, bvk.it@psgtech.ac.in²

Abstract

In the diagnosis and early detection of Glaucoma and diabetic retinopathy, when delicate vasculature grows in the retina, precise identification and localization of the border optic disc are highly significant. This research provides an automated method to localize and detect the optic disc. The proposed method uses the clustering methodology to locate the optic disc region. Fuzzy C Mean and Density Based Scan (DB Scan) clustering approach is evaluated on the publicly accessible DRIVE, diaretdb1, diaretdb0, and databases, which were created to aid comparative investigations on optic disc localization and detection in retinal images. With Diaretdb0 and Drive DB, the DB Scan clustering approach obtained an accuracy of 94.11% and 81.18%, respectively, which is better than the Fuzzy C mean, and it performs DB scan better for the DiaretDB1 dataset.

Keywords: Optic Disc, Clustering, Fuzzy C Mean, DB Scan, Fundus image

1. Introduction

The retina, a translucent structure at the back of the eye, the blood vessels, and optic nerve disc make up the eye fundus, which aids in the detection of many eye illnesses. Glaucoma is a severe condition in the human eye that can be managed but not cured. If the condition of Glaucoma is left untreated, loss of vision progresses progressively, with the possibility of blindness. Glaucoma is detected and diagnosed by tracking changes in the optic cup part of the Optic Disc (OD). The segmentation method shall be used to separate the optical disc area from the retinal images by an automated system. Finding the optic disc, however, is essential for simplifying this segmentation. Therefore, various approaches for locating OD have been the major area of research [1-8] [37-38].

Glaucoma is often diagnosed by considering a patient's condition, doing a physical examination, completing a visual field loss test, and monitoring the OD Intra Ocular Pressure (IOP) using ophthalmoscopy to check the optic nerve's shape and color. The OD is a cross-sectional image of the optic nerve that connects each eye's retina. In a retinal fundus image, it appears to be a brilliant circular spot. However, the IOP destroys the nerve fibers that make up the optic nerve in Glaucoma. As a result, OD develops the Optic Cup, a hollow and crater-like depression at the front of the nerve head. The OD's edge also dilates, and the hue changes from a healthy pink to a faint pink [9].

The possibility of using technologies in ophthalmic analysis and computer vision approaches grows as digital images, and processing power improves. Based on qualities used in image analysis, such as a yellowish disc, brightness, and high contrast through which the blood vessels and optic nerves flow, the technical technique has successfully found the optic disc. As a result, the optic disc has more specific information that may be used to identify it [10].

The OD's edge and center must be identified to distinguish it from other retinal structures and serve as a mark. Techniques for optic disc localization published in the literature often try to determine the approximate center of the disc or place it inside a defined area such as a circle or square [11].

The clustering approach, which distributes data points to numerous groups created on joint correlations and then seeks to uncover parallels and linkages within each grouping, is the best criterion for finding the optimal solution for these challenges. Least-squares solutions are used to discover the optimum place for each data point in a probability space constrained by two or more clusters [12].

The most important objective of this work is to determine and localize the optic disc regions using the clustering techniques on the publicly available dataset, with many variants of clustering techniques available in the literature, Fuzzy C Mean (FCM) and Density Based Scan (DBScan) techniques are considered, and the performance measure of those algorithms are measured, and the comparative analysis is made.

The article is organized as: Section 2 introduces the associated fieldworks that have been done. It also explains why the recommended method is being considered. The approach for optic disc localization and its execution are discussed in Section 3. The results are analyzed in Section 4, and the research is concluded in Section 5.

2. Related Works

Recursive region growth was employed by Sinthunayothin et al., [13] which resulted in detecting hard exudates and an optic disc. The OD was eliminated by locating the area with the most intensity fluctuation between consecutive pixels. Akara and Uyyanonvara [14] used low-contrast images with FCM and morphological-based segmentation to find exudates. FCM was used for coarse segmentation, whereas morphological reconstruction was used for finer segmentation. Akara [15] conducted a series of tests and compared FCM clustering, Naive Bayesian (NB) classifier, Support Vector Machine (SVM), Nearest Neighbour (NN) Classifier, and identified exudates to hand-drawn ground-truths by ophthalmologists. As a result, FCM obtained the highest sensitivity of 97.29 percent.

Hussain F. Jaafar et al. [16] suggested an approach that combines edge detection and region growth with top-down image segmentation and local thresholding. Exudates with firm exudates were graded. For segmentation of potential exudate areas, Maria Garcia et al., [17] employed a blend of global thresholding and local thresholding. RBF networks were trained by using candidate areas. The trained network performed pixel-by-pixel categorization. Vijayamadhewaran et al., [18] employed Contextual Clustering (CC) to extract features, which were then fed into an RBF network. Neera Singh et al., [19] utilized FCM clustering. Then, color, size, edge, and texture were taken from the arising clusters. Finally, using a system-based Backpropagation Neural Network, the pixels were classified into exudates and non-exudates.

SIFT characteristics were recovered from a small ROI region ranging from the site of the optic disc outward toward the center of the retina by Nathan Silberman et al. [20]. The Gaussian SVM was trained to classify particular patches of an image using these attributes. For optic disc identification, Vijayakumari et al., [21] employed template matching. To discover items with sharp edges, the authors employed the Sobel edge detector to find yellowish objects, and used the upgraded MDD classifier. Ivo Soares et al., [22] employed morphological operators in conjunction with adaptive thresholding. The authors claimed that contrast variations, non-uniform lighting, and a changing backdrop do not affect the approach, resulting in accurate identification.

Different strategies for OD and OC extraction for CDR computation are documented in the literature. Huiqi et al., [23] based optical disc detection implemented Active Shape Model (ASM). The parameters for this model were initialized using the Principal Component Analysis

approach. Experimental findings demonstrated the technique's quicker convergence rate and resilience. Huajun Ying et al., [24] developed a fractal-based algorithm to autonomous OD localization and segmentation in retinal images. K. Shekar [25] developed an OD segmentation approach based on A.R. Hussain's [26] proposal employing active genetic outlines to segment the optic nerve head.

Liu et al. [27] offered technique to extract the OD and cup ratio. First, the spotted contour was irregular owing to the impact of blood pots and was extracted by variational level set method. Next, the intensity and edge level set technique was used to detect the cup border. For high and low-risk retinal images, thresholding strategies gave improved outcomes. Finally, an elliptical fitting was accomplished for smoothening the boundary.

According to Padmavathi et al. [28], the quality of an underwater image differs from that of an image captured in the air because several elements influence it, including the water media, troposphere, compression, and temperature. This means that image segmentation is required for digital image processing. Image segmentation divides a representation into portions with robust correlations with objects to reflect the unaffected information gathered from this present reality. The simplest method for virtually all robotized image recognition systems is image segmentation.

Naz et al. [29] discovered that image processing researchers are revolutionizing this process because it is the finest and most precise way of spotting medical imaging. A huge amount of work on collecting information from an image and separating it into defined sections has supported numerous approaches that have been put forward to execute enhancements fast. Though, due to the unclear cluster borders revealed in photos, there are complexity, time, and precision restrictions. On the other hand, Fuzzy approaches are mostly unrestricted of issues and produce significantly improved results than other image segmented methods.

In addition, Yambal [30] demonstrated that segmentation is an unsupervised classification approach and a key phase in the advanced image analysis process. Segmentation of Digital Medical Images Detecting anomalies, finding significant features, categorizing data, and compressing data are some original Clustering works. The goal of the image segmentation method, which uses the classic FCMs technique based on a hierarchical self-organized map, is to successfully segment noisy images.

Khalid et al. [31] demonstrated that FCMs could detect various ailments, including Glaucoma, characterized by a rise in intraocular pressure that severely damages the optic nerve.

Glaucoma is the shared origin of vision loss and is irretrievable, but it can be managed for a long time with early detection and appropriate treatment. Norouzi et al. [32] demonstrated the mechanism of clustering algorithms without data training. These methods use an unsupervised learning algorithm and distinct expert to estimate similar features in an image. Also hold things such as keys to distinguish other features with similar characteristics. This process is likeminded with utmost data mining algorithms because unsupervised approaches do not require data training.

Kumar et al. [33] investigated correlative distance by employing large starting prototypes and Gaussian weights to construct fuzzy weights after eliminating, grouping, and merging. The geographical information was included in normal FCM spatial FCMs procedures, and every cluster membership weight was altered after considering the cluster distribution in the vicinity. According to Ali et al., [35] segmentation is an important stage in the sensitive study of human tissue lesions to increase the division of various clusters of images based on comparable characteristics. The region is expanding, and thresholding algorithms, among those developed thus far, have trouble calculating the threshold value. Computer algorithms that do pixel-by-pixel categorization are computationally intensive. Edge-based techniques struggle to distinguish between pixels belonging to arteries and pixels belonging to exudate edges. It's tough to determine the no. of clusters in clustering-based systems.

3. Methodology

A. Dataset Description

The whole optic disc localization process is tested and assessed using the Diaretdb0, Diaretdb1, and Drive datasets, the publicly available retinal fundus imaging datasets. The DiaretDB1 dataset has around 89 fundus retinal images acquired at Kuopio University Hospital. 84 photos were deemed to have moderate non-proliferative diabetic retinopathy based on the marks presented, while the remaining five images were healthy [36]. Diaretdb0 contains 130 color fundus photographs, 20 images of normal, and 110 images have diabetic retinopathy symptoms. DRIVE comprises of 40 images obtained from a diabetic retinopathy screening program in the Netherlands.

B. Fuzzy C Mean Clustering:

FCM is a clustering technique that assigns membership to each data point based on its distance from the corresponding cluster center. The likelihood of a data point belonging to a

particular cluster center increases with its distance from the center. The initial stage of FCM clustering involves setting the cluster value, selecting a value for m , and initializing the partition matrix U . Next, the centroids are computed, and the partition matrix is updated, followed by repetition of this process until convergence is reached.

C. DB Scan Clustering:

DB Scan Clustering refers to unsupervised learning techniques that aim to identify distinct clusters or groups in data. The method operates on the underlying assumption that a cluster in the data space is a region with a high point density, separated from other clusters by areas with a low point density. It can detect clusters of varying shapes and sizes, including noise and outliers, even in extensive datasets. To initiate the process, DB Scan selects an arbitrary point and checks if there are at least two points within a specified radius. If so, they are considered the part of the same cluster. The clusters are then expanded recursively by computing the neighborhood for each neighboring point.

D. Optic Disc Localization:

Optic disc location is carried out in a series of tasks, with Fig.1 showing the various implementation stages for detecting optic discs from fundus images. Initially, an image of the fundus is collected from publicly available datasets and pre-processed to eliminate noise. Then, the optic disc area is obtained using the Fuzzy C mean, and DB scan clustering approaches.



Figure 1. Methodology of Optic Disc Localization

After completing the pre-processing of the input, the Fuzzy C Mean and DB Scan clustering algorithms are utilized to identify the optic disc region. The input image and the resulting images from the segmented clustering process on the Diaretdb0 dataset are depicted in Fig.2. In contrast, Fig.3 represents the sample input and the Clustering segmented output images of the Diaretdb1 dataset, and Fig.4 represents the sample input and the clustering segmented output images of the Drive dataset.

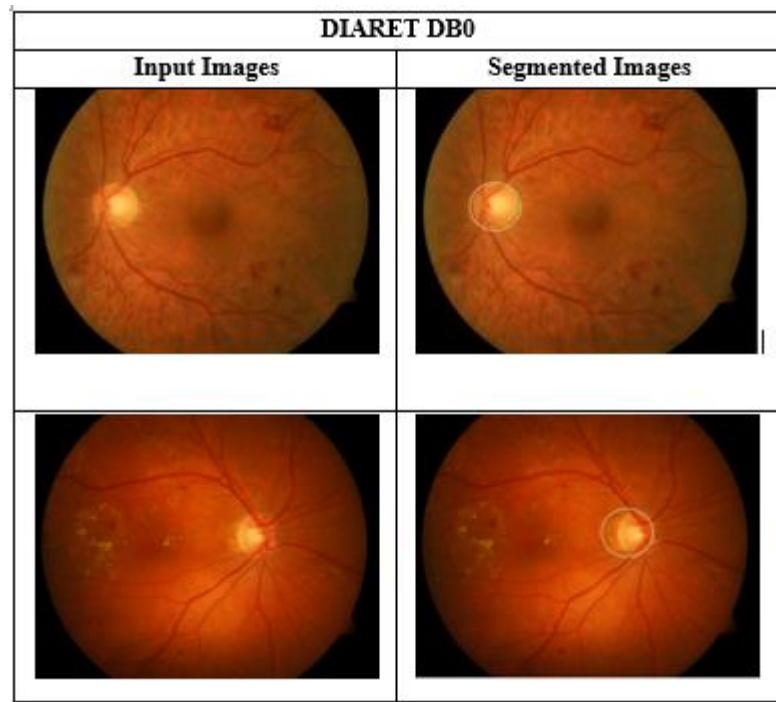


Figure 2. Optic disc Localization in DIARET DB0 dataset

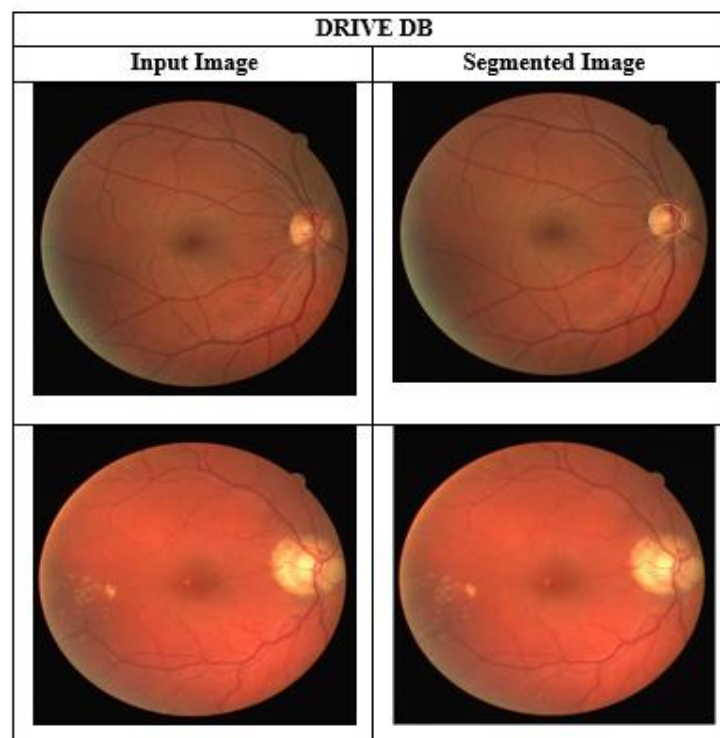


Figure 3. Optic disc Localization in DIARET DB1 dataset

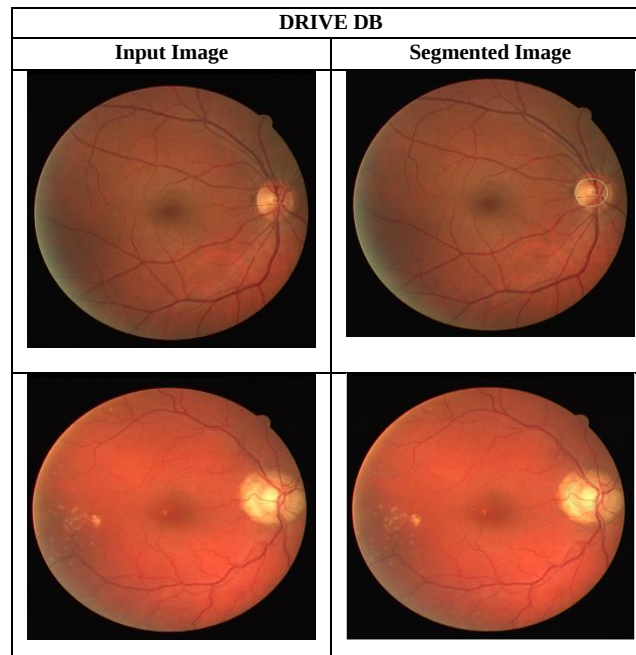
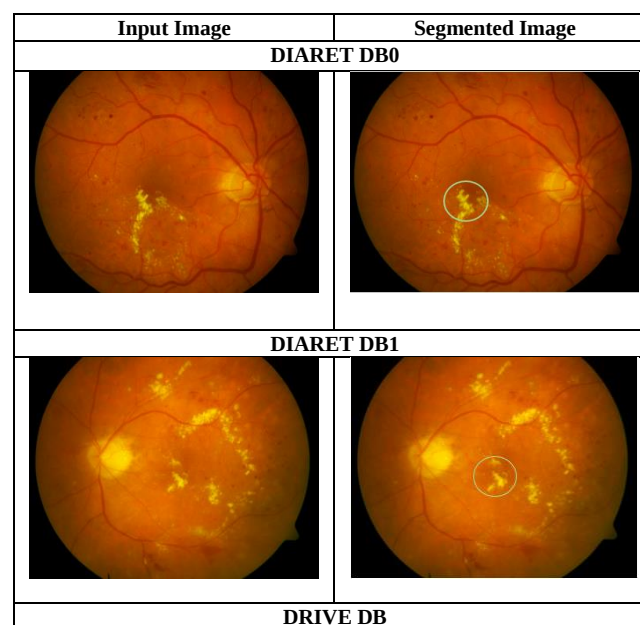


Figure 4. Optic disc Localization in DRIVE dataset

The clustering techniques used do not work to determine the optic disc of the images. Few images did not determine the optic disc correctly, as those images had many challenges like many bright spots like exudates. Some of the sample improper segmented images are shown in Fig.5.



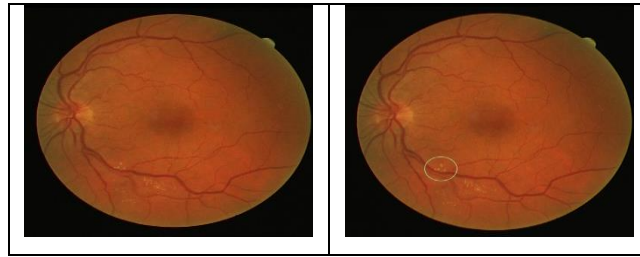


Figure 5. Sample images of improper optic disc localization

4. Result Analysis

The evaluation of Fuzzy C Mean and DB Scan clustering techniques is based on various metrics such as Accuracy, Precision, Recall, and F1 score. Table 1 and Table 2 present the performance results of these clustering methods on the DIARET DB0, DIARET DB1, and DRIVE datasets. The accuracy of the performance parameters demonstrated in these tables indicates that Fuzzy C Mean clustering is superior to DB Scan clustering for the DIARET DB1 dataset, whereas DB Scan clustering outperforms Fuzzy C Mean clustering for the other datasets, namely Diaretdb0 and Drive dataset.

Table 1. Result analysis of DB Scan Clustering

	DIARETDB0	DIARETDB1	DRIVE DB
PRECISION	94.11	96.45	98.68
RECALL	97.45	85.28	81.81
ACCURACY	94.11	80.19	81.18
F1 SCORE	95.75	90.52	89.46

Table 2. Result analysis of Fuzzy CMean Clustering

	DIARETDB0	DIARETDB1	DRIVE DB
PRECISION	92.19	89.76	91.24
RECALL	87.71	86.75	87.07
ACCURACY	83	89.29	80.42
F1 SCORE	89.89	88.23	89.11

Figures 6-8 represent the performance of the Fuzzy C Mean and DB Scan clustering technique on DIARET DB0, DIARET DB1, and DRIVE datasets, respectively.

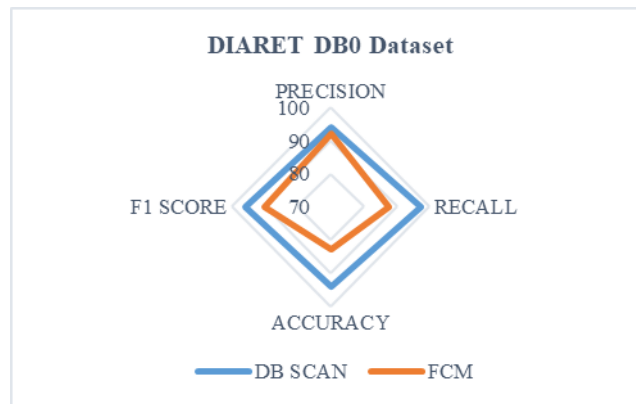


Figure 6. Accuracy, Precision, Recall, and F1-Score of DIARETDB0 dataset

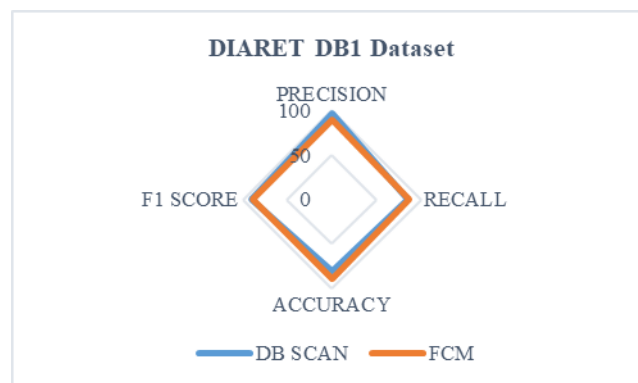


Figure 7. Accuracy, Precision, Recall, and F1-Score of DIARETDB1 dataset

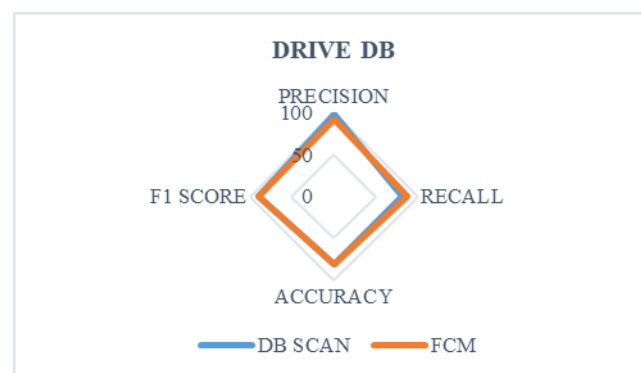


Figure 8. Accuracy, Precision, Recall, and F1-Score of DRIVE dataset

5. Conclusion

This research has proposed an automated method for diagnosing Glaucoma and diabetic retinopathy, which relies on optic disc segmentation utilizing the Fuzzy C Mean and DB Scan clustering techniques. The evaluation of this approach's performance is based on metrics such as Precision, Recall, F1-Score, and Accuracy. The results indicate that DB Scan performs better than Fuzzy C Means on the Diaretddb0 and Drive datasets, while Fuzzy C Means outperforms DB Scan for the Diaretddb1 dataset. To further improve the optic disc localization, future research could explore enhancing the pre-processing stage and leveraging learning and optimization techniques.

References

- [1] R. P. Apeksha and L. Bhailal, "A Review Paper on Detection of Optic Disc Damage using Retinal Images," *International Journal of Computer Applications* (0975 – 8887), vol. 111, no. 13, pp. 1–4, 2015.
- [2] Lamia AbedNoor Muhammed, "Localizing Optic Disc in Retinal Image Automatically with Entropy Based Algorithm", *International Journal of Biomedical Imaging*, vol. 2018, Article ID 2815163, 7 pages, 2018. <https://doi.org/10.1155/2018/2815163>.
- [3] Rajesh R, Mathivanan B. Predicting Flight Delay using ANN with Multicore Map reduce framework, *Communication and Power Engineering*. In Walter de Gruyter GmbH & Co KG; 2017.
- [4] Prakash, J., Vinoth, K. B., & Sandhya, R. (2022). Heart disease classification using regional wall thickness by ensemble classifier. *Bioinformatics and Medical Applications*, 99-116. <https://doi.org/10.1002/9781119792673.ch6>
- [5] Prakash, J., & Kumar, B. V. (2021). An empirical analysis of hierarchical and partition-based clustering techniques in optic disc segmentation. *Intelligent Learning for Computer Vision*, 85-96. https://doi.org/10.1007/978-981-33-4582-9_7
- [6] Kumar BV, Janani K, Priya NM. A survey on automatic detection of hard exudates in diabetic retinopathy. In: 2017 International Conference on Inventive Systems and Control (ICISC). IEEE; 2017.

- [7] Prakash, J., & Vinoth Kumar, B. (2021). Automatic localization of optic disc in retinal fundus image based on unsupervised learning. *Studies in Big Data*, 245-278. https://doi.org/10.1007/978-3-030-75657-4_11
- [8] Li, K., Zhou, L., Prakash, J., Wu, T., Zhang, S., & Kumar, B. (2022). A novel JAYA algorithm for optic disc localisation in eye fundus images. *International Journal of Computational Vision and Robotics*, 12(3), 1. <https://doi.org/10.1504/ijcvr.2022.10044827>
- [9] Bajwa, M.N., Malik, M.I., Siddiqui, S.A. et al. Two-stage framework for optic disc localization and glaucoma classification in retinal fundus images using deep learning. *BMC Med Inform Decis Mak* 19, 136 (2019). <https://doi.org/10.1186/s12911-019-0842-8>
- [10] M. U. Akram, A. Khan, K. Iqbal, and W. H. Butt, "Retinal Images: Optic Disk Localization and Detection," in *Proceedings of the International Conference Image Analysis and Recognition (ICIAR '10)*, vol. LNCS 6112, Part II, pp. 40–49, Springer-Verlag Berlin Heidelberg, Berlin, Germany, 2010.
- [11] Usman Akram, M., Khan, A., Iqbal, K., Butt, W.H. (2010). Retinal Images: Optic Disk Localization and Detection. In: Campilho, A., Kamel, M. (eds) *Image Analysis and Recognition. ICIAR 2010. Lecture Notes in Computer Science*, vol 6112. Springer, Berlin, Heidelberg. https://doi.org/10.1007/978-3-642-13775-4_5
- [12] Mohammed, B. A., & Al-Ani, M. S. (2020). Digital medical image segmentation using fuzzy C-means clustering. *UHD Journal of Science and Technology*, 4(1), 51-58. <https://doi.org/10.21928/uhdjst.v4n1y2020.pp51-58>
- [13] C. Sinthanayothin, "Automated detection of diabetic retinopathy on digital fundus images", *Diabetic Medicine*, 19, pp 105-112, 2002.
- [14] Akara Sopharak, Bunyarit Uyyanonvara, "Automatic exudates detection from diabetic retinopathy retinal image using fuzzy C-means and morphological methods", *proceedings of the third conference on international Conference: Advances in Computer science and Technology*, Phuket, Thailand, pp. 359-364, April 02-04, 2007.

- [15] Akara Sopharak, “Comparative Analysis of Automatic Exudates Detection between Machine Learning and Traditional Approaches”, IEJCE Transaction of INF & SYST, VOL.E92-D.NO.11. 2009, pp 2264-2271.
- [16] H.F. Jaafar, A.K. Nandi and W. Al-Nauimy, “Automated detection of exudates in retinal images using a split-and-merge algorithm,” EUSIPCO 2010, Alborg, pp. 1622-1626, 2010.
- [17] Maria Garcia, Clara I. Sanchez, Jesus Poza, Maria I. Lopez and Roberto Hornero,” Detection of Hard exudates In Retinal Images using A Radial Basis classifier”, Annals Of Biomedical Engineering, Vol.37. No. 7. 2009. Pp 1448- 1463
- [18] R. Vijayamadheswaran, Dr. M. Arthanari, M.Sivakumar, “Detection Of Diabetic Retinopathy Using Radial Basis Function”, International Journal Of Innovative Technology & Creative Engineering, Vol.1 No.1.2011, pp 40-47.
- [19] Neera Singh, Ramesh Chadra Tripathy, “Automates Early Detection Using Image Analysis Techniques”, International Journal Of Computer Applications Volume 8-No.2, 2010, pp 18-23
- [20] Nathan Silberman, Kritiy Ahlrich, Rob Fergus and Lakshminarayanan Subramanian, “Case for Automated Detection of Diabetic Retinopathy”, Association for Advancement of Artificial Intelligence, 2010.
- [21] Vijayakumari,N.SuriyaNaraynan,”Diabetic Retinopathy-Early Detection Using Image Processing Techniques”, International Journal On Computer Science and Engineering, Vol 2, No. 02, 2010, pp 357 361
- [22] Ivan Soares, Miguel Castelo-Branco, Antonio M, G. Pinnheiro ,” Exudates Dynamic Detection In Retinal Fundus Images Based On The Noise Map Distribution”, 19th European Signal processing Conference 2011, pp 46- 50.
- [23] Huiqi Li, Opas Chutatape “Boundary detection of optic disc by a modified ASM method”, The Journal of the Pattern Recognition Society, Vol. 36, pp. 2093-2104,2003
- [24] Huajun Ying, Ming Zhang and Jyh-Charn Liu, “Fractal-Based Automatic Localization and Segmentation of Optic Disc in Retinal Images”, 28th Annual International Conference of the IEEE Engineering In Medicine and Biology Society (EMBS), 2007

- [25] S. Sekhar, “Automated Localization Of Optic Disk And Images”, Proc. 16th European Signal Processing Conference (EUSIPCO 2008), Lausanne, Switzerland, August 25-29, 2008.
- [26] Hussain, A.R., “Optic nerve head segmentation using genetic active Contours”, International Conference on Computer and Communication Engineering, 2008, ICCCE 2008, 13-15 May 2008, pp.783 – 787, Univ. Teknikal Malaysia, Melaka, May 2008.
- [27] J.Liu, J.H.Lim, and H.Li, “ARGALI”: An automatic cup to disc ratio measurement system for Glaucoma analysis using Level set Image processing,” in SPIE Medical Imaging, San Diego, USA, Feb 2008.
- [28] G. Padmavathi, M. M. Kumar and S. K. Thakur. “Nonlinear image segmentation using fuzzy c means clustering method with thresholding for underwater images”. IJCSI International Journal of Computer Science Issues, vol. 7, no. 3, pp. 35-40, 2010.
- [29] S. Naz, H. Majeed and H. Irshad. “Image Segmentation Using Fuzzy Clustering: A Survey”. In: 6th International Conference on Emerging Technologies, Islamabad, Pakistan, 2010.
- [30] M. Yambal and H. Gupta. “Image segmentation using Fuzzy C means clustering: A survey”. International Journal of Advanced Research in Computer and Communication Engineering, vol. 2, no. 7, pp. 1-5, 2013.
- [31] N. E. A. Khalid, N. M. Noor and N. Ariff. “Fuzzy c-means (FCM) for optic cup and disc segmentation with morphological operation”. Procedia Computer Science, vol. 42, pp. 255-262, 2014.
- a. Norouzi, M. S. M. Rahim, A. Altameem, T. Saba, A. E. Rad, A. Rehman and M. Uddin. “Medical image segmentation methods, algorithms, and applications”. IETE Technical Review, vol. 31, no. 3, pp. 199-213, 2014.
- [32] R. Kumar, G. Satheesh and B. Nisha. “MRI brain image segmentation using Fuzzy C means cluster algorithm for tumor area measurement”. International Journal of Engineering Technology Science and Research, vol. 4, no. 9, pp. 929-935, 2017.
- [33] N. A. Ali, B. Cherradi, A. E. Abbassi, O. Bouattane, M. Youssfi. “GPU Fuzzy c-means algorithm implementations: Performance analysis on medical image segmentation”. Multimedia Tools and Applications, vol. 77, no. 16, pp. 21221-21243, 2018.

- [34] Kauppi T, Kalesnykiene V, Kamarainen J-K, Lensu L, Sorri I, Raninen A, Voutilainen R, Kalviainen H, Pietila J. DIARETDB1 diabetic retinopathy database and evaluation protocol. In: Medical image understanding and analysis, 2007, proceedings of 11th conference; 2007.
- [35] Staal JJ, Abramoff MD, Niemeijer M, Viergever MA, van Ginneken B. Ridge based vessel segmentation in color images of the retina. *IEEE Trans Med Imaging*. 2004;23(4):501–9.
- [36] Prakash, J., Vinoth Kumar, B. (2023). JAYA Algorithm Versus Differential Evolution: A Comparative Case Study on Optic Disc Localization in Eye Fundus Images. In: Akan, T., Anter, A.M., Etaner-Uyar, A.Ş., Oliva, D. (eds) *Engineering Applications of Modern Metaheuristics. Studies in Computational Intelligence*, vol 1069. Springer, Cham. https://doi.org/10.1007/978-3-031-16832-1_3
- [37] Prakash, J., & Vinoth Kumar, B. (2021). Optic Disc Detection in Fundus Eye Images – A Detailed Survey. In *ICCAP 2021: Proceedings of the first International Conference on combinatorial and optimization*, ICCAP 2021, December 7-8 2021, Chennai, India. European Alliance for Innovation.